

[Aug-2017 Dumps Share PassLeader New 67q JN0-680 Exam Questions

New Updated JNCIP-DC JN0-680 Exam Questions from PassLeader JN0-680 PDF dumps! Welcome to download the newest PassLeader JN0-680 VCE dumps: <https://www.passleader.com/jn0-680.html> (67 Q&As)

Keywords: JNCIP-DC JN0-680 exam dumps, JN0-680 exam questions, JNCIP-DC JN0-680 VCE dumps, JNCIP-DC JN0-680 PDF dumps, JN0-680 practice tests, JN0-680 study guide, JN0-680 braindumps, Data Center, Professional (JNCIP-DC) Exam P.S. New JNCIP-DC JN0-680 dumps PDF: https://drive.google.com/open?id=0B-ob6L_QjGLpNjJ1YWhaVXJseWc

NEW QUESTION 1

Which EVPN service consists of a single broadcast domain per EVPN instance?

- A. a VLAN bundle service interface
- B. a VLAN-based service interface
- C. a port-based VLAN-aware service interface
- D. a port-based service interface

Answer: B

Explanation:

<https://tools.ietf.org/html/draft-ietf-l2vpn-evpn-08#section-6.1>

NEW QUESTION 2

Which two statements are correct when performing a unified ISSU? (Choose two.)

- A. The master Routing Engine and backup Routing Engine must be running the same software version before you can perform a unified ISSU.
- B. Unicast RPF-related statistics are not saved across a unified ISSU, and the unicast RPF counters are reset to zero during a unified ISSU.
- C. Unicast RPF-related statistics are saved across a unified ISSU, and the unicast RPF counters are not reset to zero during a unified ISSU.
- D. The backup Routing Engine must be running the most recent software version before you can perform a unified ISSU.


Answer: AB

Explanation:

https://www.juniper.net/documentation/en_US/junos/topics/reference/requirements/issu-system-requirements.html

NEW QUESTION 3

Referring to the exhibit, PE1 and PE2 are acting as MPLS Layer 3 VPN PEs to provide the DCI between DC1 and DC2, which are IP Fabrics. Leaf1 and Leaf2 are QFX5100 Series devices acting as VXLAN Layer 2 Gateways using EVPN signaling for the same VXLAN segment.

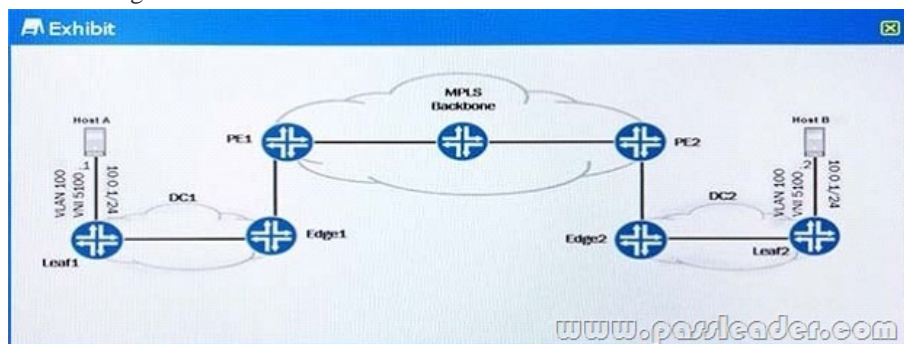

Which statement is correct about the Edge1 device in this scenario?

- A. Edge1 must be configured for MP-BGP using EVPN signaling.
- B. Edge1 must be configured for MP-BGP using L3VPN signaling.

- C. Edge1 must be configured for BGP labeled unicast on its PE1-facing interface.
- D. Edge1's routing table must contain an IP route to both Leaf1 and Leaf2.

Answer: A

Explanation:

Assumption here that the MPLS backbone network offers EVPN; this is the most fully-featured solution. This could also be achieved via C; BGP-LU shared with the provider, basically extending MPLS down to the Edge1+2 routers; this is less `risky' for the MPLS backbone operator. B and D are ignoring EVPN/VXLAN components and refer to traditional Layer 3 IP routing.

https://www.juniper.net/documentation/en_US/junos/topics/concept/evpns-overview.html

NEW QUESTION 4

Referring to the exhibit, which two MAC addresses are learned from the local side of the MC-LAG link?

www.passleader.com

```
Ethernet switching table : 3 entries, 3 learned  
Routing instance : default-switch
```

Vlan name	MAC address	MAC flags	Age	Logical interface
v15	4c:96:14:e8:c6:fd	DR	-	ae0.0
v15	4c:96:14:e8:c6:fe	DL	-	et-0/0/51.0
v15	4c:96:14:e8:f0:21	DR	-	ae0.0
v15	4c:96:14:e8:a6:16	DL	-	et-0/0/51.0

- A. 4c:96:14:e8:c6:fe and 4c:96:14:e8:a6:16
- B. 4c:96:14:e8:c6:fd and 4c:96:14:e8:f0:21
- C. 4c:96:14:e8:c6:fd and 4c:96:14:e8:a6:16
- D. 4c:96:14:e8:f0:21 and 4c:96:14:e8:a6:16

Answer: A

Explanation:

Flag `DL' means Dynamic, Locally-learned (DR means Dynamic, Remote PE MAC)

NEW QUESTION 5

An EX9200 switch is acting as a Layer 3 VXLAN gateway. In this scenario, which action will allow you to communicate between two VLANs?

- A. Configure L3 physical interfaces to connect the VXLANs.
- B. Configure IRB interfaces to connect the VXLANs.
- C. Configure LAG interfaces to connect the VXLANs.
- D. Configure a VPLS instance.

Answer: B

Explanation:

https://www.juniper.net/documentation/en_US/junos/topics/example/sdn-vxlan-ovsdb-inter-vxlan-routing-data-center-configuring.html

NEW QUESTION 6

You are deploying a spine-and-leaf IP Fabric in your data center using EBGp. In this scenario, which three statements are true? (Choose three.)

- A. Each device should use a different autonomous system number.
- B. Each leaf must peer to each spine.
- C. Each device should also run an IGP to advertise loopback interfaces.
- D. EBGp does not require a next-hop self-policy.
- E. Each leaf must peer to every other leaf.


Answer: ABD

Explanation:

<http://www.juniper.net/us/en/local/pdf/whitepapers/2000565-en.pdf>

NEW QUESTION 7

VMs on Server-1 and Server-2 are on the same Layer 2 domain within a VCF and are sending traffic to each other.

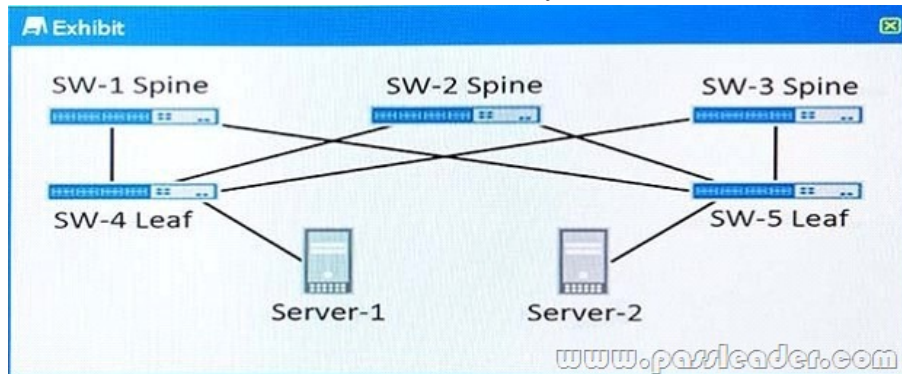

Referring to the exhibit, which three criteria are used when load-balancing traffic? (Choose three.)

- A. EtherType
- B. source MAC
- C. incoming port ID
- D. Layer 4 source port
- E. destination IP

Answer: ABC

Explanation:

<http://nextheader.net/2016/10/28/virtual-chassis-fabric-part-ii-control-and-forwarding-plane/>

Layer 2 load-balancing hashing does not involve Layer 3 or Layer 4 header information. I.E.: Layer 2: source MAC, destination MAC, Ethertype, Vlan ID, Incoming Port ID, source member ID.

NEW QUESTION 8

??

Download the newest PassLeader JNCIP-DC JN0-680 dumps from passleader.com now! 100% Pass Guarantee!

JNCIP-DC JN0-680 PDF dumps & JNCIP-DC JN0-680 VCE dumps: <https://www.passleader.com/jn0-680.html> (67 Q&As) (New Questions Are 100% Available and Wrong Answers Have Been Corrected! Free VCE simulator!)

P.S. New JNCIP-DC JN0-680 dumps PDF: https://drive.google.com/open?id=0B-ob6L_QjGLpNjJ1YWhaVXJseWc